



Tecumseh


WINTSYS®

Solution for outdoor conditions. Ready-to-install and value for money. Medium and low temperature applications.

- ▶ High efficiency
- ▶ Easy to install
- ▶ Reliability

FEATURES

- ▶ Tecumseh's reciprocating compressor, industry proven for reliability
- ▶ Required electrical components supplied pre-installed
- ▶ Rugged design, handles ambient temperatures up to 46°C
- ▶ Fan condenser coil optimization
- ▶ Stylish housing design
- ▶ Base / floor mounting

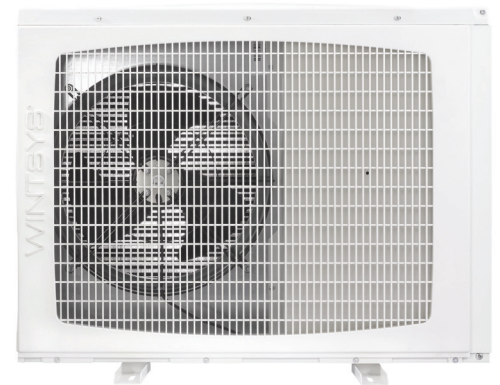


APPLICATIONS

Walk-in cold rooms and refrigerated display cases, ice machines, fermentation chambers and floral cases.



AUTHORISED REFRIGERANTS

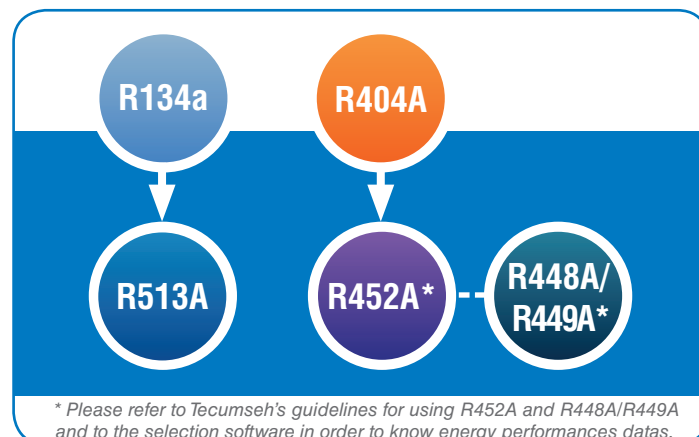



WINTSYS®

Solution for outdoor conditions. Ready-to-install and value for money. Medium and low temperature applications.

+ MBP R452A

SIZE	DESIGNATION	VOLTAGE	COOLING CAP. (KW)
S	WINAE4450Z	FZ	0,80
	WINAE4460Z	FZ	0,96
	WINAE4470Z	FZ	1,05
	WINAJ9480Z	FZ, TZ	1,29
	WINAJ9510Z	FZ, TZ	1,57
	WINAJ9513Z	FZ, TZ	1,97
	WINAJ4517Z	FZ, TZ	2,09
	WINAJ4519Z	FZ, TZ	2,60
M	WINFH4524Z	FZ, TZ	3,10
	WINFH4531Z	FZ, TZ	3,95
	WINAW4538Z	XC, XG	4,81

+ MBP R134a

SIZE	DESIGNATION	VOLTAGE	COOLING CAP. (KW)
S	WINAE4450Y	FZ	0,7
	WINAE4460Y	FZ	0,9
	WINAJ4476Y	FZ	0,9
	WINAJ4492Y	FZ, TZ	1,2
	WINAJ4511Y	FZ, TZ	1,6
	WINAJ4513Y	FZ	1,9
	M	WINFH4518Y	FZ, TZ
WINFH4525Y		FZ, TZ	2,8

EN 13215 Ambient temperature 32°C, Superheating 10K, Sub cooling 3K, Evaporating temperature -10°C.

- LBP R452A

SIZE	DESIGNATION	VOLTAGE	COOLING CAP. (KW)
S	WINAE2425Z	FZ	0,31
	WINAJ2440Z	FZ	0,44
	WINAJ2446Z	FZ, TZ	0,58
	WINAJ2464Z	FZ, TZ	0,78
M	WINFH2480Z	FZ, TZ	1,03
	WINFH2511Z	FZ, TZ	1,38

EN 13215 Ambient temperature 32°C, Superheating 10K, Sub cooling 3K, Evaporating temperature -35°C. R452A - Mid conditions.

ELECTRICAL EQUIPMENT

- ▶ Pre-wired Electrical Box
- ▶ AC induction fan motor
- ▶ Crankcase Heater
- ▶ Isolator Switch
- ▶ Contactor
- ▶ High/low pressure with auto/manual reset switch
- ▶ DIN Rail length increased



NWD0148