



FLEXY

Multi-refrigerant range. AJ, AG Compressors.
One range designed for use with several refrigerants.
HBP applications: R-452A, R-404A, R-448A/R-449A, R-134a, R-513A.
LBP applications: R-452A, R-404A and R-448A/R-449A.

- ▶ Less models in stock
- ▶ Improved availability
- ▶ F-Gas compliance
- ▶ Multiple applications

FEATURES

Nearly two years of testing has been devoted to the new refrigerants, insuring that product reliability and performance are in strict accordance with our standards.

This range, designed for use with several refrigerants, offers simplicity to both wholesalers and installers.




APPLICATIONS

Primary applications: walk-in cold rooms and refrigerated display cases.
Secondary applications: reach-in, ice machines, industrial process cooling.



AUTHORISED REFRIGERANTS

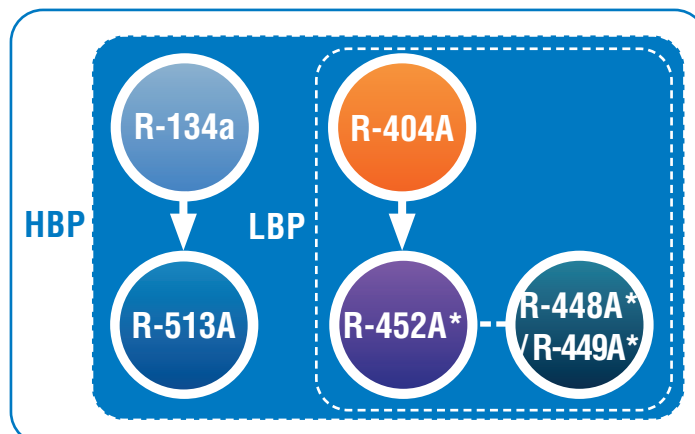

* Please refer to Tecumseh's guidelines for using R-452A and R-448A/R-449A and to the selection software in order to know energy performances datas.





FLEXY

Multi-refrigerant range. AJ, AG Compressors.
One range designed for use with several refrigerants.

COMPRESSOR CROSS REFERENCE

Multi-refrigerant range and R-134a /R-404A equivalents

MULTI-REFRIGERANT RANGE	APPLI-CATION	VOL-TAGE	R-404A EQUIVALENT	R-134a EQUIVALENT
C/TAJ9480X	MHP	FZ / TZ	C/TAJ9480Z	C/TAJ4452Y
C/TAJ9510X	MHP	FZ / TZ	C/TAJ9510Z	C/TAJ4461Y
C/TAJ9513X	MHP	FZ / TZ	C/TAJ9513Z	C/TAJ4476Y
C/TAJ4517X	HBP	FZ / TZ	C/TAJ4517Z	C/TAJ4492Y
C/TAJ4519X	HBP	FZ / TZ	C/TAJ4519Z	C/TAJ4513Y
TAG4546X	HBP	TZ	TAG4546Z	TAG4528Y
TAG4553X	HBP	TZ	TAG4553Z	TAG4534Y
TAG4561X	HBP	TZ	TAG4561Z	TAG4537Y
TAG4568X	HBP	TZ	TAG4568Z	TAG4543Y
TAG4573X	HBP	TZ	TAG4573Z	TAG4547Y
TAG4581X	HBP	TZ	TAG4581Z	/

+ HBP RANGE AND PERFORMANCE

HBP MODEL	VOL-TAGE	Cooling Capacity Watt				
		R-404A	R-452A	R-448A/ R-449A	R-134a	R-513A
CAJ/TAJ9480X	FZ, TZ	1080	1052	1022	580	615
CAJ/TAJ9510X	FZ, TZ	1354	1318	1282	723	766
CAJ/TAJ9513X	FZ, TZ	1702	1657	1611	943	1000
CAJ/TAJ4517X	FZ, TZ	1929	1878	1826	1065	1129
CAJ/TAJ4519X	FZ, TZ	2515	2450	2381	1520	1612
TAG4546X	TZ	5086	4952	4811	3154	3344
TAG4553X	TZ	5796	5645	5485	3521	3733
TAG4561X	TZ	6623	6449	6269	3934	4171
TAG4568X	TZ	7899	7692	7474	4350	4612
TAG4573X	TZ	8532	8309	8073	4720	5005
TAG4581X	TZ	9435	9188	8930	5070	5376

Evaporating T° -10°C, condensing T° +45°C, sub cooling 3K, SH 10K.

COMPRESSOR CROSS REFERENCE

Multi-refrigerant range and R-404A equivalents

MULTI-REFRIGERANT RANGE	APPLI-CATION	VOLTAGE	R-404A EQUIVALENT
CAJ2428X	LBP	FZ	CAJ2428Z
CAJ2432X	LBP	FZ	CAJ2432Z
CAJ2440X	LBP	FZ / TZ	C/TAJ2440Z
C/TAJ2446X	LBP	FZ / TZ	C/TAJ2446Z
C/TAJ2464X	LBP	FZ / TZ	C/TAJ2464Z
TAG2513X	LBP	TZ	TAG2513Z
TAG2516X	LBP	TZ	TAG2516Z
TAG2519X	LBP	TZ	TAG2519Z
TAG2522X	LBP	TZ	TAG2522Z
TAG2525X	LBP	TZ	TAG2525Z

- LBP RANGE AND PERFORMANCE

LBP MODEL	VOLTAGE	Cooling Capacity Watt		
		R-404A	R-452A	R-448A/ R-449A
CAJ/TAJ2428X	FZ, TZ	252	233	214
CAJ/TAJ2432X	FZ, TZ	313	289	265
CAJ2440X	FZ	380	351	323
CAJ/TAJ2446X	FZ, TZ	515	475	437
CAJ/TAJ2464X	FZ, TZ	681	629	577
TAG2513X	TZ	1260	1164	1071
TAG2516X	TZ	1575	1434	1300
TAG2519X	TZ	1922	1800	1712
TAG2522X	TZ	2206	2038	1874
TAG2525X	TZ	2475	2286	2100

Evaporating T° -35°C, condensing T° +40°C, sub cooling 3K, SH 10K.

