



FLEXY

Multi-refrigerant range. AJ FH AG Compressors.
One range designed for use with several refrigerants.
HBP applications: R452A, R404A, R448A/R449A, R134a, R513A.
LBP applications: R452A, R404A and R448A/R449A.

- ▶ Less models in stock
- ▶ Improved Availability
- ▶ F-Gas Compliance
- ▶ Multiple Applications

FEATURES

Nearly two years of testing has been devoted to the new refrigerants, insuring that product reliability and performance are in strict accordance with our standards.

This range offers simplicity to both wholesalers and installers is designed for use with several refrigerants.

- ▶ less models in stock
- ▶ improved availability
- ▶ one compressor for many applications




APPLICATIONS

Primary applications: walk-in cold rooms and refrigerated display cases.
Secondary applications: reach-in, ice machines, industrial process cooling.



REFRIGERANTS

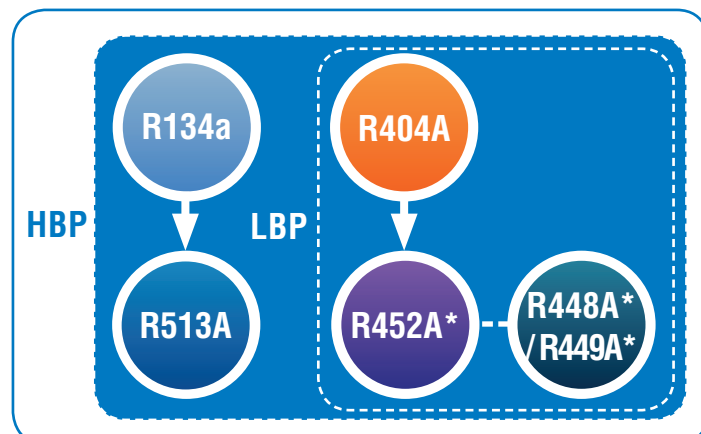

*Please strictly refer to Tecumseh Guidelines and Marketing Bulletin when using these refrigerants.





FLEXY

Multi-refrigerant range. AJ FH AG Compressors.
One range designed for use with several refrigerants.

COMPRESSOR CROSS REFERENCE

Multi-refrigerant range and R134a /R404A equivalents

MULTI-REFRIGERANT RANGE	APPLI-CATION	VOL-TAGE	R404A EQUIVALENT	R134a EQUIVALENT
C/TAJ9480X	MHP	FZ / TZ	C/TAJ9480Z	C/TAJ4452Y
C/TAJ9510X	MHP	FZ / TZ	C/TAJ9510Z	C/TAJ4461Y
C/TAJ9513X	MHP	FZ / TZ	C/TAJ9513Z	C/TAJ4476Y
C/TAJ4517X	HBP	FZ / TZ	C/TAJ4517Z	C/TAJ4492Y
C/TAJ4519X	HBP	FZ / TZ	C/TAJ4519Z	C/TAJ4513Y
FH/TFH4522X	HBP	FZ / TZ	FH/TFH4522Z	/
FH/TFH4524X	HBP	FZ / TZ	FH/TFH4524Z	/
FH/TFH4531X	HBP	FZ / TZ	FH/TFH4531Z	FH/TFH4518Y
FH/TFH4540X	HBP	FZ / TZ	FH/TFH4540Z	FH/TFH4525Y
TAG4546X	HBP	TZ	TAG4546Z	TAG4528Y
TAG4553X	HBP	TZ	TAG4553Z	TAG4534Y
TAG4561X	HBP	TZ	TAG4561Z	TAG4537Y
TAG4568X	HBP	TZ	TAG4568Z	TAG4543Y
TAG4573X	HBP	TZ	TAG4573Z	TAG4547Y
TAG4581X	HBP	TZ	TAG4581Z	/

+ HBP RANGE AND PERFORMANCE

HBP MODEL	VOL-TAGE	Cooling Capacity Watt				
		R404A	R452A	R448A/ R449A	R134a	R513A
CAJ/TAJ9480X	FZ, TZ	1080	1052	1022	580	615
CAJ/TAJ9510X	FZ, TZ	1354	1318	1282	723	766
CAJ/TAJ9513X	FZ, TZ	1702	1657	1611	943	1000
CAJ/TAJ4517X	FZ, TZ	1929	1878	1826	1065	1129
CAJ/TAJ4519X	FZ, TZ	2515	2450	2381	1520	1612
FH/TFH 4522X	FZ, TZ	2438	2416	2347	1560	1654
FH/TFH 4524X	FZ, TZ	2840	2766	2688	1629	1801
FH/TFH 4531X	FZ, TZ	3698	3601	3500	2212	2346
FH/TFH 4540X	FZ, TZ	4820	4694	4562	2900	3075
TAG4546X	TZ	5086	4952	4811	3154	3344
TAG4553X	TZ	5796	5645	5485	3521	3733
TAG4561X	TZ	6623	6449	6269	3934	4171
TAG4568X	TZ	7899	7692	7474	4350	4612
TAG4573X	TZ	8532	8309	8073	4720	5005
TAG4581X	TZ	9435	9188	8930	5070	5376

Evaporating T° -10°C, condensing T° +45°C, sub cooling 3K, SH 10K.

COMPRESSOR CROSS REFERENCE

Multi-refrigerant range and R404A equivalents

MULTI-REFRIGERANT RANGE	APPLI-CATION	VOLTAGE	R404A EQUIVALENT
CAJ2428X	LBP	FZ	CAJ2428Z
CAJ2432X	LBP	FZ	CAJ2432Z
CAJ2440X	LBP	FZ / TZ	C/TAJ2440Z
C/TAJ2446X	LBP	FZ / TZ	C/TAJ2446Z
C/TAJ2464X	LBP	FZ / TZ	C/TAJ2464Z
FH/TFH2480X	LBP	FZ / TZ	FH/TFH2480Z
FH/TFH2511X	LBP	FZ / TZ	FH/TFH2511Z
TAG2513X	LBP	TZ	TAG2513Z
TAG2516X	LBP	TZ	TAG2516Z
TAG2519X	LBP	TZ	TAG2519Z
TAG2522X	LBP	TZ	TAG2522Z
TAG2525X	LBP	TZ	TAG2525Z

- LBP RANGE AND PERFORMANCE

LBP MODEL	VOLTAGE	Cooling Cap. Watt		
		R404A	R452A	R448A/ R449A
CAJ/TAJ2428X	FZ, TZ	252	233	214
CAJ/TAJ2432X	FZ, TZ	313	289	265
CAJ2440X	FZ	380	351	323
CAJ/TAJ2446X	FZ, TZ	515	475	437
CAJ/TAJ2464X	FZ, TZ	681	629	577
FH/TFH2480X	FZ, TZ	924	830	785
FH/TFH2511X	FZ, TZ	1224	1145	1039
TAG2513X	TZ	1260	1164	1071
TAG2516X	TZ	1575	1434	1300
TAG2519X	TZ	1922	1800	1712
TAG2522X	TZ	2206	2038	1874
TAG2525X	TZ	2475	2286	2100

Evaporating T° -35°C, condensing T° +40°C, sub cooling 3K, SH 10K.

